

DECLARATION OF PERFORMANCE OF SMOKE AND HEAT CONTROL SYSTEMS

1. *Unique identification code of the product-type:*

OTF VISION OFVELE - OFVEPE

2. *Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11 paragraph 4: Information given on the tracking label:*

Order confirmation Number + Product Number + Date of production

3. *Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:*

3.1 Product description:

Natural smoke and heat exhaust ventilator with a single casement, for wall installation on a horizontal axis in a bottom or top hung opening outside configuration, or on a vertical axis side hung opening outside style. The infill can be in cellular polycarbonate, in glass or insulated double skin aluminium (thermally or acoustically).

3.2 Installation and implementation conditions in accordance with the certified performances.

- Wall installation ($\pm 30^\circ$)
- Dimensional range: (Hht and Lht are the overall dimensions of the product)

Side cylinders:

	OFVELE C415 Bottom or top hung			OFVELE C415 Side hung			OFVELE C600 Bottom or top hung			OFVELE C600 Side hung	
				With :	If Lpa < 1800 mm then Hpa $\leq$ Lpa / 2 If Lpa $\geq$ 1800 mm then Hpa $\leq$ Lpa / 3					With :	Hpa $\leq$ Lpa / 2
	Minimum	Maximum		Minimum	Maximum		Minimum	Maximum		Minimum	Maximum
LHT (mm)	666	2544	1744	1216	2544	1944	444	2644	1344	1380	2644
HHT (mm)	666	1344	1744	666	944	1044	769	1644	2644	769	1394

Perpendicular cylinders:

	OFVEPE C415 Bottom or top hung			OFVEPE C415 Side hung		
				With :	If Lpa < 1800 mm then Hpa $\leq$ Lpa / 2 If Lpa $\geq$ 1800 mm then Hpa $\leq$ Lpa / 3	
	Minimum	Maximum		Minimum	Maximum	
LHT (mm)	666	2544	1744	1216	2544	1944
HHT (mm)	666	1344	1586	666	944	1044

3.3 Mode of operation: Electrical motor opening and closing

Voltage: $U_a = U_c = 24 \text{ Vcc}$

Power: $P_a = P_c$ absorbed in a steady state (40 W max)

For OFVELE C600: 1 lock if $A_v \leq 3 \text{ m}^2$ - 2 locks if $A_v > 3 \text{ m}^2$

$P_a = P_c = 12 \text{ W}$ by lock

3.4 Possible options:

Open / Close position switches

4. *Name, registered trade name or trademark, in conformity with article 11, paragraph 5:*

Company name:

SOUCHIER – BOULLET SAS
Parc Segro – 42 rue de Lamirault
CS 20762
77090 COLLEGIEN
France

Production unit:

SOUCHIER – BOULLET SAS
11, rue du 47eme R.A
70400 HERICOURT
France

6. *7. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:*

The notified body **TÜV Rheinland N° 0336** performed the determination of the product type on the basis of type testing, type calculation of the product, the initial inspection of the manufacturing plant and the factory production control and the continuous surveillance, assessment and evaluation of the factory production control under system 1 and issued the certificate of constancy of performance N°

CE Certificate N° 0336 – CPR – 89208434

DECLARATION OF PERFORMANCE OF SMOKE AND HEAT CONTROL SYSTEMS

9. Declared performances :


Harmonised technical specification: EN 12101-2003	Essential characteristics	Performance
	Nominal activation conditions / sensitivity, as: Initiation device Opening mechanism Inputs and outputs	Présent Présent Présent
	Response delay (response time), as: Reliability Opening under (snow, wind) load Low ambient temperature Fire Performance	≤ 60 s
	Operational reliability, as: Reliability	Re 1000 (+10 000), Type B
	Effectiveness of smoke / hot gas extractions, as: Aerodynamic free area (see graph)	$A_a = A_v^* \times C_v^{**}$
	Performance parameters under fire conditions, as: Resistance to heat Mechanical stability Reaction so fire: Panel or glass insulated Polycarbonate	B ₃₀₀ 30 $\Delta A_{throat} < 10 \%$ A1 B-s1; d0
	Performance under environmental conditions, as : Opening under load Low ambient temperature Stability under wind load Resistance to wind induced vibration (where included) Resistance to heat	SL NPD T (00) WL 1500 NPD B ₃₀₀ 30
	Durability, as: Response delay (response time) Operational reliability Performance parameters under fire conditions	≤ 60 s Re 1000 (+10 000), ≤ 60 s, $\Delta A_{throat} < 10 \%$

Free aerodynamic surface calculation

$$A_a = A_v \times C_v^{**}$$

$$A_v = L_{pa} \times H_{pa}$$

**Cv: calculation of flow coefficient

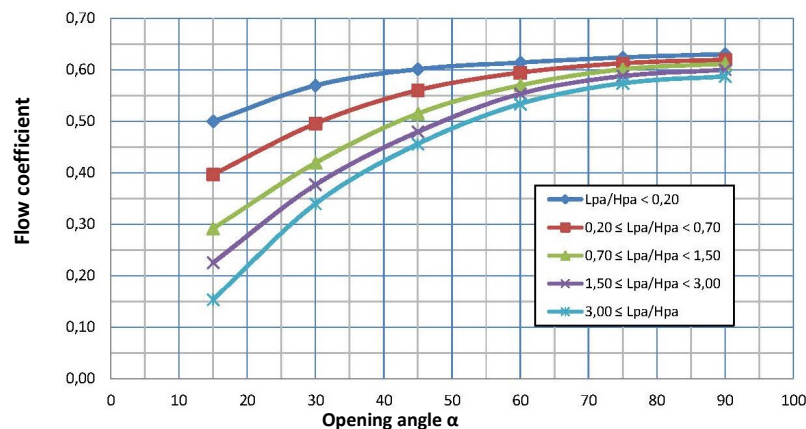

Outward Side

—●— Lpa/Hpa ≥ 5,00
—■— 5,00 > Lpa/Hpa ≥ 1,43
—▲— 1,43 > Lpa/Hpa ≥ 0,67
—×— 0,67 > Lpa/Hpa ≥ 0,33
—*— Lpa/Hpa < 0,33

10. The performance of the product identified in points 1 et 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by: **David Maillart – R&D Manager**

The 22/06/2026
In Collégien